




MASTERS[®]


YELLOW -TAPE[®] Gas Seal Tape

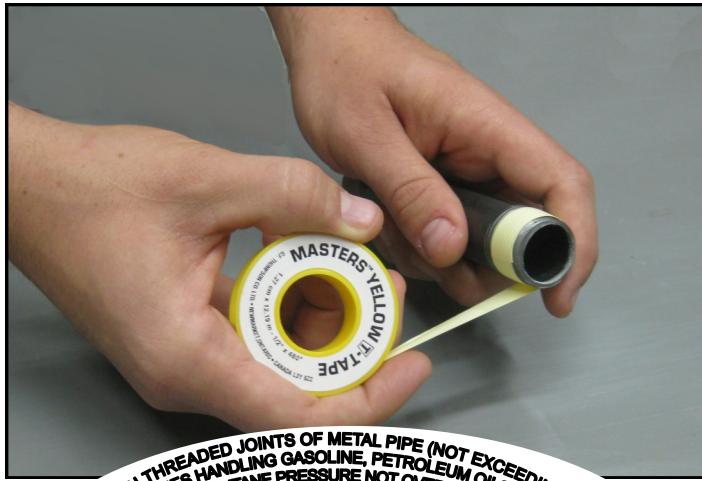

FOR USE ON THREADED JOINTS OF METAL PIPE (NOT EXCEEDING 3 INCH NPS) IN ASSEMBLIES HANDLING GASOLINE, PETROLEUM OILS, NATURAL GAS, PROPANE AND BUTANE PRESSURE NOT OVER 15514 kPa / 2250 psi

MASTERS[®] YELLOW -TAPE seals all metal and plastic threaded connections against leakage at temperatures from -400°F to +600°F (-240°C to +316°C).


MASTERS[®] YELLOW -TAPE is non-corrosive, non-flammable, clean, easy to use and is available in a wide range of widths and lengths. Joints disassemble easily, even after years of service. It is coloured yellow for easy identification during inspection.

Because it is chemically inert, **MASTERS[®] YELLOW -TAPE** is impervious to virtually everything including:

Directions:

- Make sure threads are clean and remove any shreds of previously applied tape.
- Beginning with the first thread of the male end, wrap tape in the direction of the thread spiral. Use enough for a good seal.
- Tighten the joint using a wrench.

- Acids & Alkalis
- Air
- Ammonia
- Chlorine
- CO₂
- Fuels
- Gasoline
- Hydrocarbons
- Kerosene
- Natural Gas (ULC Tape Only)
- Nitrogen
- Oxygen
- Refrigerants (most)
- Solvents
- Steam
- Water

	Catalogue Number	Description	Quantity per Case	Approximate Case Shipping Weight	
* 	TYB260	1/2" x 260" (1.27 cm x 6.6 m) Roll	24	1.4 lbs	0.7 kg
	TYB480	1/2" x 480" (1.27 cm x 12.19 m) Roll	24	1.9 lbs	0.9 kg
	TYB480V	1/2" x 480" (1.27 cm x 12.19 m) Roll	100	8 lbs	3.6 kg


G. F. THOMPSON CO. LTD.

The professional choice since 1947

1-800-499-3673 www.gfthompson.com Canada



Meets MIL SPEC A-A-58092 (superseding T-27730A)

*  Listed by Underwriter's Laboratories of Canada and the U.S. For up to 3" pipe.