



# FULL PORT BRASS BALL VALVE

**Cat. No. 425**

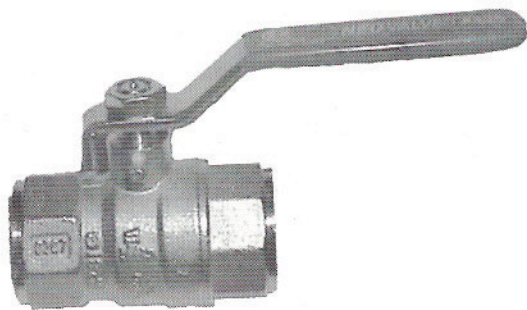

Cat. No. 425

- CSA 3.16 Certified for Natural and Propane Gases
- Minus 40°C Service
- 100% Full Port for Maximum Flow Capacity, Minimum Pressure Loss
- 600 WOG (125 PSI for Natural and Propane Gases)
- Hard Chrome Plated Body Protects Against Corrosion
- Hard Chrome Plated Ball for Smooth Turning Action
- Blow-out Proof Stem Design to Eliminate Risk of Leakage through Stem
- Durable Reinforced Handle Design
- Quick and Precise 1/4 Turn Actuation
- NPT Connections
- Suitable for Actuation
- Full Size Range From 1/4" to 4"
- Available with butterfly handles 425 BH (Smaller Sizes)
- Available with square head for wrench operation (425F) - sizes 1" - 2"

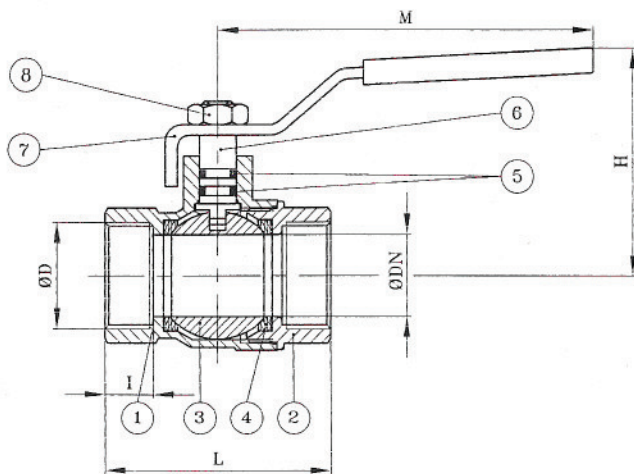

## DIMENSIONS (mm)

R	DN	L	I	M	H
1/4"	10	46	11.5	81	38
3/8"	10	47.5	11.5	81	38
1/2"	14	56.7	15.5	93	52.5
3/4"	18.5	63	16.1	93	57.5
1"	23.5	75	19	112	62
1 1/4"	30	86	20	112	66
1 1/2"	37	95.5	20	143	77
2"	47	108.5	20.5	143	81.5
2 1/2"	60	137.7	26	280	127
3"	74	162	27	280	138.5
4"	96	183.5	28	280	151

## COMPONENTS (sizes 1/4" to 2" only)\*

No.	Part Name	Material
1	Body Valve	Chrome Plated
2	Brass Shoulder	Chrome Plated
3	Ball	Chromed
4	Seat	P.T.F.E. (Teflon)
5	O-Ring	NBR
6	Metal Ring	
7	Lever Handle	Zinc Coated
8	Nut	Zinc Coated

\* Note: Sizes 2 1/2", 3", 4" utilize adjustable packing gland design.

**Note:** Due to continuous development of our range of valves, we reserve the right to alter the dimensions and information contained in all our literature as required.

