



GAS VALVES

700 Series - Actuators

The Robertshaw® 700 Series Gas Valves are the industry standard with capacity ranges from 5,000 to 1,150,000 BTUs. Several actuator types are available depending upon the application such as 24 Volts, Line Voltage, Millivolt and Hydraulic.




Standard 700 shown with Millivolt gray top actuator

Specifications

Part Numbers	Description	Gas Valve Model	Pressure Regulator Setting	Ambient Temperature Rating	Thermostat Temperature Range	Electrical Rating	NEC
705-401	12V DC/24V AC Actuator	7000E	NR	-40°F to 175°F (-40°C to 80°C)	NA	12V DC, 0.18 Amps 24V AC, 0.2 Amps	Class 2
705-402	12V DC/24V AC Actuator	7000ER	3.5" WC	-40°F to 175°F (40°C to 80°C)	NA	12V DC, 0.18 Amps 24V AC, 0.2 Amps	Class 2
705-452	12V AC Actuator	7000ER-120	3.5" WC	-40°F to 175°F (-40°C to 80°C)	NA	120V AC, 0.034 Amps	Class 1
705-461	24V AC Actuator	7000E-240	NR	-40°F to 175°F (-40°C to 80°C)	NA	240V AC, 0.017 Amps	Class 1
705-462	24V AC Actuator	7000ER-240	3.5" WC	-40°F to 175°F (-40°C to 80°C)	NA <td 240V AC, 0.017 Amps	Class 1	

Note: All the above models are available in regulated (R), high/low (RB), convertible (RC) or non-regulated (NR).

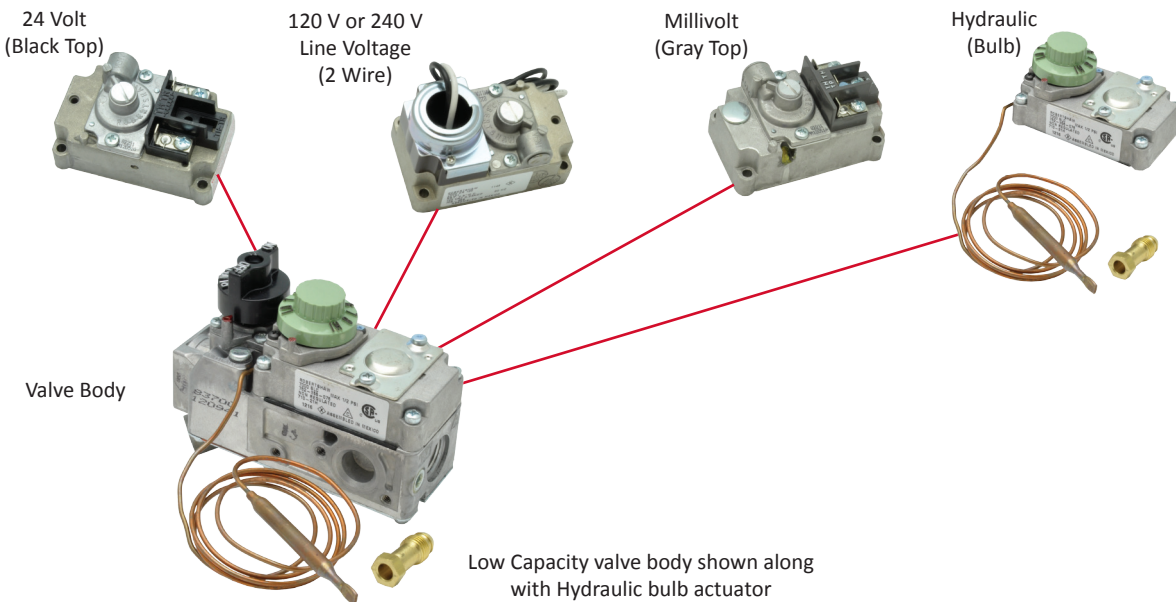

RoHS

1 Year Limited Warranty