

GAS OVEN SAFETIES

1710 (TS BODY) GAS CARRIER

The 1710 Series Replacement Body is used with the 1720 Series Replacement Magnet Heads in TS Automatic Safety Valve applications. Note arrows showing direction of gas flow.

IMPORTANT NOTICE: When a new 1710 replacement body is ordered a new 1720 safety magnet must also be used. Order separately, see Magnet Heads. Complete assemblies shown below.

ORDERING DATA

INLET AND OUTLET SIZE	BODY TYPE #11	CAPACITIES (BTU/HR @ 1" W.C.P.D.)	
		NATURAL	L.P.
1/4" PIPE	1710-110	102,000	165,000
3/8" PIPE	1710-111	128,000	208,000
1/2" PIPE	1710-126	210,000	340,000
3/8" TUBE	1710-113	100,000	165,000
7/16" TUBE	1710-112	106,000	171,000



1720 (TS) "J" AND "K" MAGNET HEADS


The 1720 Series Replacement Magnet Kit is used with 1710 Series Bodies in TS Automatic Safety Valve applications. All models have FLOW INTERRUPTION so that no gas can flow to the main burner while the reset button is depressed.

1720 Series Kits are designed to replace many individual TS magnet types. Each magnet head kit is tapped for 1/8" pipe with fittings to adapt to 3/16" and 1/4" compression tubing. Also included: spring and diaphragm components, gasket and assembly screws.

ORDERING DATA

UNI-LINE ORDER NO.	PILOT SIZE	
INLET & OUTLET MODEL - TS "J" HEAD		
1720-801	KIT, 1/8" PIPE, 3/16" TUBING, 1/4" TUBING	
OUTLET ONLY MODEL - TS "K" HEAD		
1720-714	1/8" PIPE	
1720-802	KIT, 1/8" PIPE, 3/16" TUBING, 1/4" TUBING	

NOTE: The 1720-801 should not be used to replace 1720-802.
The 1720-802 should not be used to replace 1720-801.

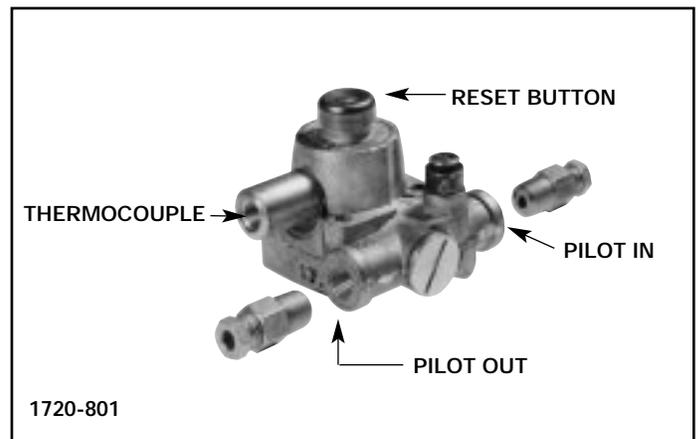

Gasket for "TS" Magnet
1720 Series



ORDER - 10-059

1720 (TS11J) COMPLETE MAGNET AND BODY ASSEMBLY

The TS valve is multi-poise and can be mounted in any position without affecting its operation. Ambient Temp 32° to 300°F. Maximum Pressure 1/2 PSI (14" W.C.)

ORDERING DATA

UNI-LINE ORDER NO.	#11 BODY INLET & OUTLET	TS "J" HEAD PILOT INLET & OUTLET	O.E.M.
1720-001	1/4" PIPE	1/8" PIPE	WOLF 705387-A
1720-002	7/16" TUBE	3/16" TUBE	—
1720-003	3/8" PIPE	1/8" PIPE	WOLF 15003
1720-004	7/16" TUBE	1/4" TUBE	VULCAN 105569-2
1720-005	1/4" PIPE	3/16" TUBE	U.S. RANGE 227010SA WELLS 59011
1720-006*	3/8" PIPE	3/16" TUBE	GARLAND 1027000
1720-007	1/2" PIPE	1/4" TUBE	GARLAND 1027001
1720-008	1/4" PIPE	1/4" TUBE	WOLF 14267 & 714267, D.C.S. 13002

*No pilot adjustment key.

